

Analogies Between the Cracking Noise of Ethanol-Dampened Charcoal and Earthquakes

H. V. Ribeiro,^{1,2,*} L. S. Costa,¹ L. G. A. Alves,¹ P. A. Santoro,¹ S. Picoli,¹ E. K. Lenzi,¹ and R. S. Mendes¹

¹*Departamento de Física, Universidade Estadual de Maringá, Maringá, PR 87020-900, Brazil*

²*Departamento de Física, Universidade Tecnológica Federal do Paraná, Apucarana, PR 86812-460, Brazil*

(Received 8 March 2015; revised manuscript received 12 May 2015; published 7 July 2015)

We report on an extensive characterization of the cracking noise produced by charcoal samples when dampened with ethanol. We argue that the evaporation of ethanol causes transient and irregularly distributed internal stresses that promote the fragmentation of the samples and mimic some situations found in mining processes. The results show that, in general, the most fundamental seismic laws ruling earthquakes (the Gutenberg-Richter law, the unified scaling law for the recurrence times, Omori's law, the productivity law, and Båth's law) hold under the conditions of the experiment. Some discrepancies were also identified (a smaller exponent in the Gutenberg-Richter law, a stationary behavior in the aftershock rates for long times, and a double power-law relationship in the productivity law) and are related to the different loading conditions. Our results thus corroborate and elucidate the parallel between the seismic laws and fracture experiments caused by a more complex loading condition that also occurs in natural and induced seismicity (such as long-term fluid injection and gas-rock outbursts in mining processes).

DOI: 10.1103/PhysRevLett.115.025503

PACS numbers: 62.20.mt, 43.40.-r, 89.20.-a, 91.30.P-

Earthquakes and the fracture of materials are phenomena deeply connected by the crackling noise idea [1,2], in which systems under slow perturbation respond through discrete events with a huge variety of sizes. The most fundamental seismic laws also emerge in laboratory-scale experiments related to the fracture of materials [3–16] and have been recently reproduced by numerical discrete element simulations of porous materials [17,18]. In these experiments, an external and constant loading is applied to the material and the system's response is usually obtained by recording acoustic emissions. A constant and compressive loading is considered the most suitable analogy to natural seismicity, since the main stresses underlying tectonic earthquakes are considered compressive and stationary [19]. In fact, a very complete parallel between the acoustic emissions produced by a porous material under constant (uniaxial) compression and earthquakes was recently reported by Baró *et al.* [20]. However, there exist other important situations related to natural and induced seismicity that do not fit the previous conditions. This is the case with seismic events produced by long-term fluid injection [21,22] and gas-rock outbursts caused by the release of gas, which is common and represents a serious threat in coal mining [23].

In these situations (where the loading is internal, transient, and irregular), a complete parallel between the cracking noise of materials and the fundamental seismic laws has not been established yet, despite considerable interest in mining processes. Here, we design a simple experiment that captures the previous features. Specifically, we study the acoustic emissions of charcoal samples damped with ethanol. At room temperature, we observe that the ethanol is absorbed through the pores of the

samples and soon evaporates, creating different and irregularly distributed internal stresses that promote the fragmentation of the samples and somehow mimic the situations found in mining. We show that these acoustic events fulfill the Gutenberg-Richter law [24–27] (with a power-law exponent smaller than those reported for earthquakes) and the unified scaling law for the recurrence times between events [28–33] (with parameters very close to those reported for small mine-induced seismicity [22]). We also characterize the sequence of aftershocks and foreshocks, where the Omori decay [34–36] is observed to hold only for short times (~ 6 sec), from which these rates display a stationary behavior. Still on the aftershock sequences, we investigate the productivity law [37], where a double power-law relationship between the number of aftershocks and the energy of the triggering mainshock is found (the first power-law exponent is much smaller than those reported for earthquakes, while the second is in the range of earthquakes). We also find that the relative difference in energy magnitude between the mainshock and its largest aftershock approaches the value of 1.2 as the mainshock energy increases (that is, an approximate quantitative agreement with Båth's law [38]). Thus, in general, we verify that the fundamental seismic laws hold in a fracture experiment caused by an internal, nonstationary, and irregular loading; however, our results also reveal some significant differences (a smaller exponent in the Gutenberg-Richter law, a stationary behavior in the aftershock rates for long times, and a double power-law relationship in the productivity law), which we attribute to the different loading conditions.

In the experiment, charcoal samples [Fig. 1(a)] for domestic use (~ 200 g), made of *Eucalyptus sp.*, are

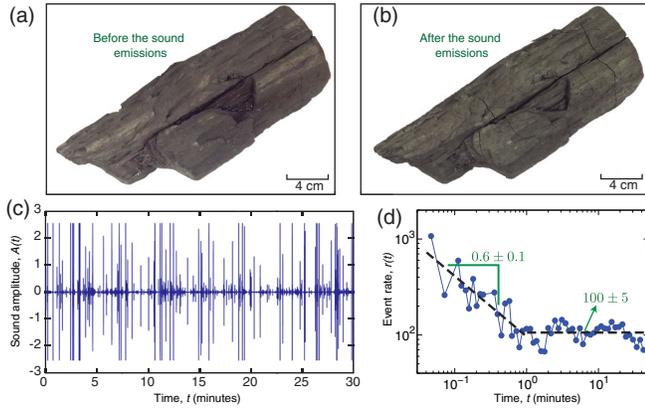


FIG. 1 (color online). Schematic description of the experiment. Panels (a) and (b) show pictures of a sample (sample no. 2) immediately before and at the end of the acoustic emissions (see Ref. [39] for a video of this process and a selection of large events). In (b), we note several fissures caused by the cracking process. Panel (c) shows the normalized sound amplitudes $A(t)$ recorded during this process. Panel (d) shows that the rate of activity $r(t)$ (number of events per minute) displays an initial power-law decay [$r(t) \sim t^{-0.6 \pm 0.1}$, for $t < 1$ min] followed by a nearly stationary behavior with average $\langle r \rangle = 100 \pm 5$ (see also Fig. S1 [40]).

dampened with ~ 30 ml of ethanol (for domestic use, hydrated with 7% water), and most of it is absorbed through the pores of the samples. The results we report are based on six samples of about the same size. After ~ 5 min, the samples start to produce a cracking noise that is recorded by a condenser microphone (Shure Microflex MX202W/N) positioned ~ 20 cm from the samples with a sampling rate of 48 kHz. The samples emit sound for ~ 30 min and during the processes they also crack, ending up very fragmented [Fig. 1(b)]. Figure 1(c) shows the normalized sound amplitudes (that is, the original amplitudes divided by the aggregated standard deviation) $A(t)$ recorded during this process. Notice that the sound emissions occur in discrete events with different magnitudes. The normalized energy associated with an event i is evaluated (analogously to other fracture experiments) via $E_i = \int_{t_{ini_i}}^{t_{end_i}} I(t) dt$, where $I(t) = [A^2(t)] / \{\max[A^2(t)]\}$ and t_{ini_i} (t_{end_i}) represents the start (end) time of the event. The value of t_{ini_i} is chosen as the time for which $I(t)$ initially exceeds a threshold I_{min} , whereas t_{end_i} represents the time for which $I(t)$ stays below I_{min} for more than Δt in seconds. All results presented here were obtained with $I_{min} = 10^{-5}$ and $\Delta t = 0.1$; however, different values for these parameters (we have tested with I_{min} from 10^{-5} to 6×10^{-4} and Δt from 0.025 to 0.5) do not change our results. The location time associated with an event i is defined as $t_i = (t_{end_i} + t_{ini_i})/2$. We have verified that the rate of activity $r(t)$ (number of events per minute) displays an approximate power-law decay in the beginning of the process followed by a nearly stationary behavior

[Fig. 1(d)]. In our analysis, we have dropped out the 5% initial and final events in order to keep the activity rates nearly stationary (see Fig. S1 in the Supplemental Material [40]).

We start by evaluating the probability distribution for the energies E . Figure 2(a) shows this distribution for one of the samples, where it exhibits a remarkable power-law behavior compatible with the Gutenberg-Richter law, that is, $P(E) \sim 1/E^\beta$, over several decades. Figure 2(b) shows the values of β estimated via the maximum likelihood method for different low energy cutoffs E^* . We note that β is quite stable over E^* . In order to assign a characteristic exponent ($\bar{\beta}$) to each sample, we have evaluated the average of β over E^* . The six samples yield values for $\bar{\beta}$ in the range [1.27–1.33], which are smaller than the $\beta \approx 1.67$ observed for earthquakes [24–27] and in the Baró *et al.* [20] experiment ($\beta \approx 1.40$).

Another important aspect of earthquakes is related to the time intervals τ between events above a lower bound energy E_{min} (also called recurrence or waiting times). Bak *et al.* [28] have proposed that after accounting for the spatial location of the events, the distributions of τ collapse onto a single curve. Corral [29–31] has argued that the occurrence of earthquakes differs from region to region and has proposed an extension to the Bak *et al.* procedure by including the local rates of seismic activities r_{xy} in the scaling operation. Thus, the distributions of τ become self-similar; $P(\tau) = r_{xy} f(r_{xy} \tau)$, where $f(x)$ is a scaling function. When r_{xy} is time dependent, $f(x)$ exhibits different power-law regimes that are almost universal across several different seismic regions, whereas for r_{xy} nearly stationary, $f(x)$ is usually adjusted by a gamma distribution $f(x) \propto x^{\gamma-1} \exp(-x/b)$, where γ and b are fitting parameters. In fact, as proposed by Saichev and

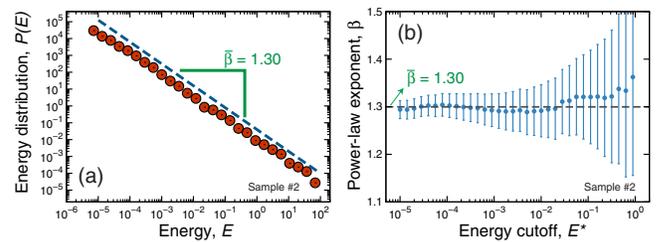


FIG. 2 (color online). The Gutenberg-Richter law. Panel (a) shows the probability distribution of the energies E using data from one experiment (sample no. 2). The dashed line represents a power-law decay where $P(E) \sim 1/E^\beta$ with $\bar{\beta} = 1.30$. Panel (b) shows the values of the power-law exponents β obtained via the maximum likelihood method as a function of a lower energy cutoff E^* , that is, considering only events with $E > E^*$. The error bars are 95% bootstrap confidence intervals. The value of $\bar{\beta}$ is the weighted average of β over E^* , where the weights are chosen to be inversely proportional to the lengths of the confidence intervals. The results for other samples are very similar (see Figs. S2 and S3 [40]).

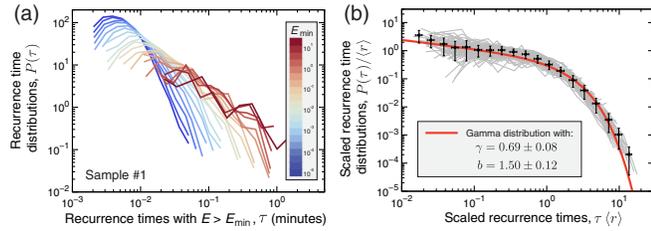


FIG. 3 (color online). Self-similarity of the recurrence times and the universal scaling law. Panel (a) shows the probability distributions of recurrence times τ with $E > E_{\min}$ using data from one experiment (sample no. 1). Each curve is associated with a value of E_{\min} , as indicated by the color code. Panel (b) shows the distributions rescaled by the mean rates of activity $\langle r \rangle$ (gray lines) using data from all experiments (samples no. 1–6). The black circles are the window average over all distributions and the error bars are 95% bootstrap confidence intervals. The solid red line is the gamma distribution adjusted to the average distribution via the ordinary least squares method (the parameters are shown in the plot). Similar results are observed for each sample (see Figs. S4 and S5 [40]).

Sornette [32], this behavior is an emergent property of aftershock superposition that holds in real seismicity under certain conditions [33]. Figure 3(a) shows the distributions of τ obtained from one of the samples and considering several values of E_{\min} , where it is clear that $P(\tau)$ depends on E_{\min} . Figure 3(b) shows the same distributions (for all samples) rescaled by the mean rates of activity $\langle r \rangle$. We observe a good collapse of the distributions and that the gamma distribution is a reasonable fit to the average behavior with $\gamma = 0.69 \pm 0.08$ and $b = 1.50 \pm 0.12$. These values are very close to those reported for earthquakes ($\gamma = 0.67 \pm 0.05$ and $b = 1.58 \pm 0.15$ [30]) and small mine-induced seismicity ($\gamma = 0.74 \pm 0.02$ and $b = 1.35 \pm 0.06$ [22])—see also Refs. [7, 10–12].

We now focus on quantifying Omori’s law in our data. Omori’s law [34–36] establishes that the number of aftershocks per unit of time, $R_a(t_{\text{ms}})$, decays as a power-law function of the elapsed time since the mainshock, t_{ms} , that is, $R_a(t_{\text{ms}}) \sim 1/t_{\text{ms}}^p$. The value of p for earthquakes differs from one catalog to another (probably due to different tectonic conditions), usually lying in the range [0.9–1.5] [34]; its value also depends on the magnitude of the mainshock [36]. In fracture experiments, Hirata [3] showed (for basalt) that the value of p decreases during the fracturing process and Baró *et al.* [20] reported a quite stable Omori decay (about six decades) with $p = 0.75 \pm 0.10$. In our case, we define the mainshock events as those with energy E_{ms} in the range $[10^j - 10^{j+1}]$ (with $j = -4, -3, \dots, 2$) and a sequence of aftershocks is the events following the mainshock until another mainshock event is found. We calculate the aftershock rates $R_a(t_{\text{ms}})$ as a function of the elapsed time since the mainshock, t_{ms} , averaging over all events in the same energy window. Figure 4(a) shows $R_a(t_{\text{ms}})$ for all energy

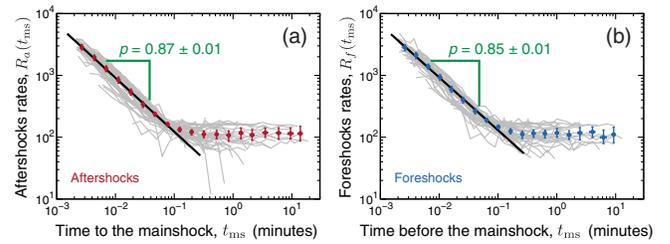


FIG. 4 (color online). Omori’s law for aftershocks and foreshocks. Panel (a) shows the number of aftershocks per unit of time [aftershock rates $R_a(t_{\text{ms}})$] as function of the time to the mainshock, t_{ms} , employing data from all experiments (samples no. 1–6). Panel (b) shows the analogue plot for the foreshocks [foreshock rates $R_f(t_{\text{ms}})$] versus the time before the mainshock, t_{ms} . The mainshocks have been defined as events with energy in the range $[10^j - 10^{j+1}]$, with $j = -4, -3, \dots, 3$. Each gray curve is an Omori plot for one of the samples with the mainshocks in one of the energy ranges. Figures S6 and S7 [40] show the results for each sample, identifying the energy range of the mainshocks. In both plots, the circles (red for aftershocks and blue for foreshocks) are the window average over all curves and the error bars are 95% bootstrap confidence intervals. We observe power-law decays (of about two decades) for $R_a(t_{\text{ms}})$ and $R_f(t_{\text{ms}})$ for $t_{\text{ms}} < 0.1$ min followed by a plateau-like behavior. The black lines are power-law functions $R_{\{a,f\}}(t_{\text{ms}}) \sim t_{\text{ms}}^{-p}$, adjusted to the average behaviors for $t_{\text{ms}} < 0.1$ min via the ordinary least squares method. The power-law exponents p are shown in the plots.

ranges and samples that we analyzed. Our results show that the Omori decay (of about two decades) with $p = 0.87 \pm 0.01$ only holds for short times ($t_{\text{ms}} \lesssim 0.1$ min), from which a stationary behavior is observed for $R_a(t_{\text{ms}})$. This stationary behavior indicates that late aftershocks occur randomly in time, such as in stochastic processes with no memory. Very similar results are obtained for the foreshock rates [Fig. 4(b)].

The productivity law states that the number of aftershocks $N_a(E_{\text{ms}})$ triggered by a mainshock of energy E_{ms} is related to E_{ms} via $N_a(E_{\text{ms}}) \sim E_{\text{ms}}^\alpha$, with $\alpha \approx 0.8$ for earthquakes [37]. In order to quantify this law in our experiment, we count the number of aftershocks $N_a(E_{\text{ms}})$ that a mainshock of energy E_{ms} triggers. Figure 5(a) shows $N_a(E_{\text{ms}})$ versus E_{ms} for all aftershock sequences (defined as in the Omori analysis) in log-log scale, where (despite the scatter) a significant dependence is observed (Pearson correlation of ≈ 0.7). This figure also shows the window average of these data, from which the average relationship between $N_a(E_{\text{ms}})$ and E_{ms} becomes clear: for $E_{\text{ms}} < 10$, we have $N_a(E_{\text{ms}}) \sim E_{\text{ms}}^\alpha$, with $\alpha = 0.28 \pm 0.01$, whereas for $E_{\text{ms}} > 10$, we find another power law with $\alpha = 0.81 \pm 0.06$. Thus, the first power-law exponent is similar to that reported by Baró *et al.* [20] ($\alpha \approx 0.33$), while it is smaller than the ones reported for earthquakes ($\alpha \in [0.7-0.9]$ [37]) and also for creep in ice single crystals ($\alpha \approx 0.6$ [6]). On the other hand, the second power-law exponent is analogous to earthquakes, but it should be considered much more

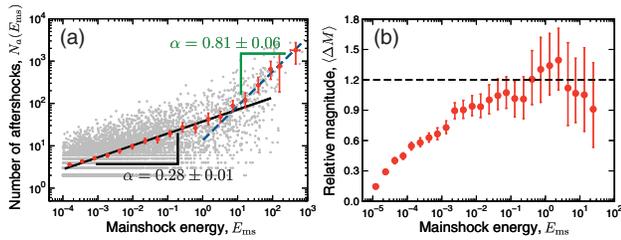


FIG. 5 (color online). The productivity law and Båth's law. The gray dots in (a) show the number of aftershocks $N_a(E_{ms})$ triggered by a mainshock of energy E_{ms} (in log-log scale). We have aggregated data from all experiments (samples no. 1–6) and the results for the samples are quite similar (Fig. S8 [40]). The red circles are window averages and the error bars are 95% bootstrap confidence intervals. For $E_{ms} < 10$, the average behavior of $N_a(E_{ms})$ is adjusted (via ordinary least squares) by a power-law relationship $N_a(E_{ms}) \sim E_{ms}^\alpha$, where $\alpha = 0.28 \pm 0.01$ (black solid line). For greater mainshocks ($E_{ms} > 10$), the average behavior starts to deviate from the previous power law and can be adjusted by another power law with $\alpha = 0.81 \pm 0.06$ (blue dashed line). Panel (b) shows the average value of the relative difference in magnitude ($\langle \Delta M \rangle$) between the mainshock, $\log E_{ms}$, and its largest aftershock, $\log E_{la}$, as a function of the mainshock energy E_{ms} (the x axis is in log scale). The red circles are the results obtained with data from all experiments (individual samples show a very similar behavior, see Fig. S9 [40]) and the error bars are 95% bootstrap confidence intervals. Notice that $\langle \Delta M \rangle$ approaches the value of 1.2 (dashed line) as E_{ms} increases.

carefully because it only accounts for about 3% of the data in a region where the relationship $N_a(E_{ms})$ versus E_{ms} displays a large scatter.

Still on the aftershock sequences, we address Båth's law [38], which states that the relative difference in energy magnitude (that is, $\log E$) between the mainshock and its largest aftershock is (on average) close to 1.2, regardless of the mainshock magnitude. To do so, we calculate the relative difference in energy magnitude between a mainshock and its largest aftershock ($\Delta M = \log E_{ms} - \log E_{la}$, where E_{la} is the energy of the largest aftershock) as a function of the mainshock energy E_{ms} . Figure 5(b) shows the average (over all samples) of this relative magnitude $\langle \Delta M \rangle$ as a function of E_{ms} . We note that $\langle \Delta M \rangle$ is systematically smaller than 1.2 for small values of E_{ms} ; however, ΔM approaches a constant plateau (for $E_{ms} \sim 10^{-1}$) as the mainshock energy E_{ms} increases. This plateau is statistically indistinguishable from Båth's law predictions. To our knowledge, this is the first time that this law has been studied for acoustic emissions experiments. The epidemic type aftershock sequence model presents a similar behavior for $\langle \Delta M \rangle$ [38] and only for $E_{ms} \sim 10^4$ ($0.8 < \beta < 1.0$ in the model) does $\langle \Delta M \rangle \approx 1.2$. Empirical observations of Båth's law for earthquakes usually report large fluctuations for ΔM estimated from individual aftershock sequences [41]. Furthermore, averaged values of ΔM also show deviations of the Båth predictions for $E_{ms} \lesssim 10^4$ [42], which are associated with

lower magnitude cutoffs in earthquake catalogs—a situation that cannot be ruled out in our experiment.

We have thus presented an extensive characterization of the acoustic emissions of charcoal samples dampened with ethanol, aiming to establish a parallel between seismic laws and a fracture experiment where the loading (caused by the absorption and evaporation of ethanol) is internal, transient, and irregular. We have found that the most fundamental seismic laws are, in general, valid in our experiments. However, some discrepancies with the case of earthquakes and fracture experiments under constant and external loading were also observed, nominally, a smaller Gutenberg-Richter exponent, a stationary behavior in the aftershock and foreshock rates for long times, and a double power-law relationship in the productivity law. We believe that the main cause of these discrepancies is the different loading conditions in our experiment. The internal stresses are irregularly distributed across the samples and may create several cracking sites acting approximately independently. This possibility partially explains the observed discrepancies: simultaneous events yield large values of energy, which contribute to a longer tail in the energy distribution and to a small power-law exponent; cracking sites operating independently also corroborate with the aleatory behavior observed over long times in the aftershock or foreshock rates. The Omori decay is also shorter for large values of the mainshock energies (Fig. S6 [40]). Finally, the crossover behavior observed for large values of mainshock energies in the productivity law can result from a superposition of mainshock events. Another possibility is that the hydrated ethanol may promote environmentally assisted crack growth (stress corrosion) that also leads to acoustic emissions. We find it very hard to directly verify these possibilities; however, stress corrosion usually happens at longer time scales (compared with our experiment), and would produce a small contribution to the acoustic events. We further believe that the simplicity of our experiment may trigger direct investigations related to previous discussions as well as a study of different solvents, sample sizes, and charcoal materials.

We are all grateful to Capes, CNPq (INCT-SC) and Fundação Araucária for financial support. H. V. R. thanks the financial support of the CNPq under Grant No. 440650/2014-3.

*hvr@dfi.uem.br

- [1] J. P. Sethna, K. A. Dahmen, and C. R. Myers, Crackling noise, *Nature (London)* **410**, 242 (2001).
- [2] E. K. H. Salje and K. A. Dahmen, Crackling noise in disordered materials, *Annu. Rev. Condens. Matter Phys.* **5**, 233 (2014).
- [3] T. Hirata, Omori's power law aftershock sequences of microfracturing in rock fracture experiment, *J. Geophys. Res.* **92**, 6215 (1987).

- [4] P. Diodati, F. Marchesoni, and S. Piazza, Acoustic emission from volcanic rocks: an example of self-organized criticality, *Phys. Rev. Lett.* **67**, 2239 (1991).
- [5] A. Petri, G. Paparo, A. Vespignani, A. Alippi, and M. Costantini, Experimental evidence for critical dynamics in microfracturing processes, *Phys. Rev. Lett.* **73**, 3423 (1994).
- [6] J. Weiss and M. C. Miguel, Dislocation avalanche correlations, *Mater. Sci. Eng. A* **387–389**, 292 (2004).
- [7] J. Davidsen, S. Stanchits, and G. Dresen, Scaling and universality in rock fracture, *Phys. Rev. Lett.* **98**, 125502 (2007).
- [8] F. Kun, M. H. Costa, R. N. Costa-Filho, J. S. Andrade Jr., J. B. Soares, S. Zapperi, and H. J. Herrman, Fatigue failure of disordered materials, *J. Stat. Mech.* (2007) P02003.
- [9] F. Kun, Z. Halász, J. S. Andrade Jr., and H. J. Herrmann, Cracking noise in sub-critical fracture of heterogeneous materials, *J. Stat. Mech.* (2009) P01021.
- [10] G. Niccolini, F. Bosia, A. Carpinteri, G. Lacidogna, A. Manuello, and N. Pugno, Self-similarity of waiting times in fracture systems, *Phys. Rev. E* **80**, 026101 (2009).
- [11] G. Niccolini, A. Schiavi, P. Tarizzo, A. Carpinteri, G. Lacidogna, and A. Manuello, Scaling in temporal occurrence of quasi-rigid-body vibration pulses due to macrofractures, *Phys. Rev. E* **82**, 046115 (2010).
- [12] G. Niccolini, A. Carpinteri, G. Lacidogna, and A. Manuello, Acoustic emission monitoring of the Syracuse Athena Temple: scale invariance in the timing of ruptures, *Phys. Rev. Lett.* **106**, 108503 (2011).
- [13] M. A. Lebyodkin, I. V. Shashkov, T. A. Lebedkina, K. Mathis, P. Dobron, and F. Chmelik, Role of superposition of dislocation avalanches in the statistics of acoustic emission during plastic deformation, *Phys. Rev. E* **88**, 042402 (2013).
- [14] E. K. H. Salje, G. I. Lampronti, D. E. Soto-Parra, J. Baró, A. Planes, and E. Vives, Noise of collapsing minerals: predictability of the compressional failure in goethite mines, *Am. Mineral.* **98**, 609 (2013).
- [15] G. F. Nataf, P. O. Castillo-Villa, P. Sellappan, W. M. Kriven, E. Vives, A. Planes, and E. K. H. Salje, Predicting failure: acoustic emission of berlinite under compression, *J. Phys. Condens. Matter* **26**, 275401 (2014).
- [16] G. F. Nataf, P. O. Castillo-Villa, J. Baró, X. Illa, E. Vives, A. Planes, and E. K. H. Salje, Avalanches in compressed porous SiO₂-based materials, *Phys. Rev. E* **90**, 022405 (2014).
- [17] F. Kun, I. Varga, S. Lennartz-Sassinek, and I. G. Main, Approach to failure in porous granular materials under compression, *Phys. Rev. E* **88**, 062207 (2013).
- [18] F. Kun, I. Varga, S. Lennartz-Sassinek, and I. G. Main, Rupture cascades in a discrete element model of a porous sedimentary rock, *Phys. Rev. Lett.* **112**, 065501 (2014).
- [19] I. Main, Statistical physics, seismogenesis, and seismic hazard, *Rev. Geophys.* **34**, 433 (1996).
- [20] J. Baró, A. Corral, X. Illa, A. Planes, E. K. H. Salje, W. Schranz, D. E. Soto-Parra, and E. Vives, Statistical similarity between the compression of a porous material and earthquakes, *Phys. Rev. Lett.* **110**, 088702 (2013).
- [21] C. Langenbruch, C. Dinske, and S. A. Shapiro, Inter event times of fluid induced earthquakes suggest their Poisson nature, *J. Geophys. Res.* **112**, B04309 (2007).
- [22] J. Davidsen and G. Kwiatek, Earthquake interevent time distribution for induced micro-, mano-, and picoseismicity, *Phys. Rev. Lett.* **110**, 068501 (2013).
- [23] X. Kong, E. Wang, S. Hu, Z. Li, X. Liu, B. Fang, and T. Zhan, Critical slowing down on acoustic emission characteristics of coal containing methane, *J. Nat. Gas Sci. and Eng.* **24**, 156 (2015).
- [24] L. Knopoff, Y. Y. Kagan, and R. Knopoff, b-values for fore- and aftershocks in real and simulated earthquake sequences, *Bull. Seismol. Soc. Am.* **72**, 1663 (1982).
- [25] T. Utsu, Representation and analysis of the earthquake size distribution: a historical review and some new approaches, *Pure Appl. Geophys.* **155**, 509 (1999).
- [26] Y. Y. Kagan, Earthquake size distribution: power-law with exponent $\beta = 1/2?$, *Tectonophysics* **490**, 103 (2010).
- [27] C. Godano, E. Lippiello, and L. de Arcangelis, Variability of the b value in the Gutenberg–Richter distribution, *Geophys. J. Int.* **199**, 1765 (2014).
- [28] P. Bak, K. Christensen, L. Danon, and T. Scanlon, Unified scaling law for earthquakes, *Phys. Rev. Lett.* **88**, 178501 (2002).
- [29] A. Corral, Local distributions and rate fluctuations in a unified scaling law for earthquakes, *Phys. Rev. E* **68**, 035102(R) (2003).
- [30] A. Corral, Long-term clustering, scaling, and universality in the temporal occurrence of earthquakes, *Phys. Rev. Lett.* **92**, 108501 (2004).
- [31] A. Corral, Universal local versus unified global scaling laws in the statistics of seismicity, *Physica (Amsterdam) A* **340**, 590 (2004).
- [32] A. Saichev and D. Sornette, “Universal” distribution of interearthquake times explained, *Phys. Rev. Lett.* **97**, 078501 (2006).
- [33] S. Touati, M. Naylor, and I. G. Main, Origin and nonuniversality of the earthquake interevent time distribution, *Phys. Rev. Lett.* **102**, 168501 (2009).
- [34] T. Utsu, Y. Ogata, and S. Matsu’ura, The centenary of the Omori formula for a decay law of aftershock activity, *J. Phys. Earth* **43**, 1 (1995).
- [35] R. Shcherbakov, D. L. Turcotte, and J. B. Rundle, A generalized Omori’s law for earthquake aftershock decay, *Geophys. Res. Lett.* **31**, L11613 (2004).
- [36] D. Sornette and G. Ouillon, Multifractal scaling of thermally activated rupture processes, *Phys. Rev. Lett.* **94**, 038501 (2005).
- [37] A. Helmstetter, Is earthquake triggering driven by small earthquakes?, *Phys. Rev. Lett.* **91**, 058501 (2003).
- [38] A. Helmstetter and D. Sornette, Bath’s law derived from the Gutenberg-Richter law and from aftershock properties, *Geophys. Res. Lett.* **30**, 2069 (2003).
- [39] http://youtu.be/8Y_uJWVeU7w and <http://youtu.be/ILCMgFtQjnc>.
- [40] Supplemental Material at <http://link.aps.org/supplemental/10.1103/PhysRevLett.115.025503> for Figs. S1–S9.
- [41] S. Hainzl, G. B. Brietzke, and G. Zöller, Quantitative earthquake forecasts resulting from static stress triggering, *J. Geophys. Res.* **115**, B11311 (2010).
- [42] C. Gu, A. Y. Schumann, M. Baiesi, and J. Davidsen, Triggering cascades and statistical properties of aftershocks, *J. Geophys. Res. Solid Earth* **118**, 4278 (2013).